

## SFS – Flow Sensor

Ultra-fast response time to enable excellent ventilation control performance

Gas mixture independent measurement

No need for calibration

No drift



### Flow Range

-24 to 240 slpm

### Accuracy

$\pm 0.1$  slpm or 2 % of reading, whichever is greatest

### Response Time

0.5 ms

### Applications

- Ventilator, anesthesia machine

### Dimensions


- Interchangeable with existing products on the market
- Approx. 58 x 30 x 28 mm

### Interface

- Molex Milli Grid 10-pin
- Supply voltage 5 V
- I2C or analog output

### Features

- Bidirectional
- Direct gas temperature measurement
- Orientation independent
- No warm-up time required

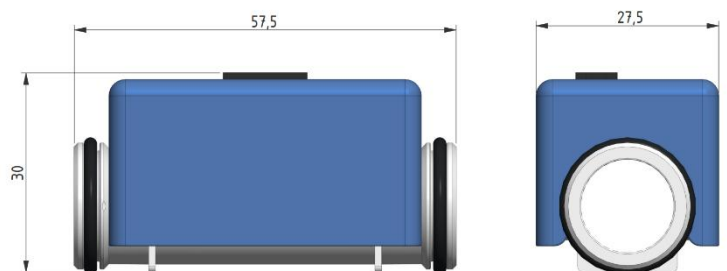

Please contact us for more information!

### Spirotronic AB

Grevgatan 34  
114 53 Stockholm  
Sweden

[info@spirotronic.com](mailto:info@spirotronic.com)

[www.spirotronic.com](http://www.spirotronic.com)